


RIDGE FLASHING

DUO PITCH RIDGE

RA 180

500
550
600

NOTES



MATERIALS

- 1 mm mill finish aluminum
- 1 mm prepainted aluminum
- 0.6 mm stainless steel
- 0.6 mm galvanized steel
- 0.6 mm copper
- 0.8 mm titanium-Zinc

SUITABLE FOR

- Riverclack 500
- Riverclack 550
- Riverclack Grip 600

RELATED COMPONENTS


- N°12 6x29 stainless steel, hexagon profile self-drilling screws
- N°12 Ø16 INOX washers, with gasket
- Silicone

NOTES

- Item suitable for 6 panels
- Flashing overlap 200mm
- Make two silicone strips in the overlap zone
- When ordering, specify x° degree and the width A
- In case of mounting in critical climatic zones (cyclonic zones, strong winds, heavy storms, etc.) a qualified technician design to take specific loads under consideration is needed; prudential designs, with fixings to the structure, are recommended

WWW.RIVERCLACK.COM

TECHNICAL SITUATION

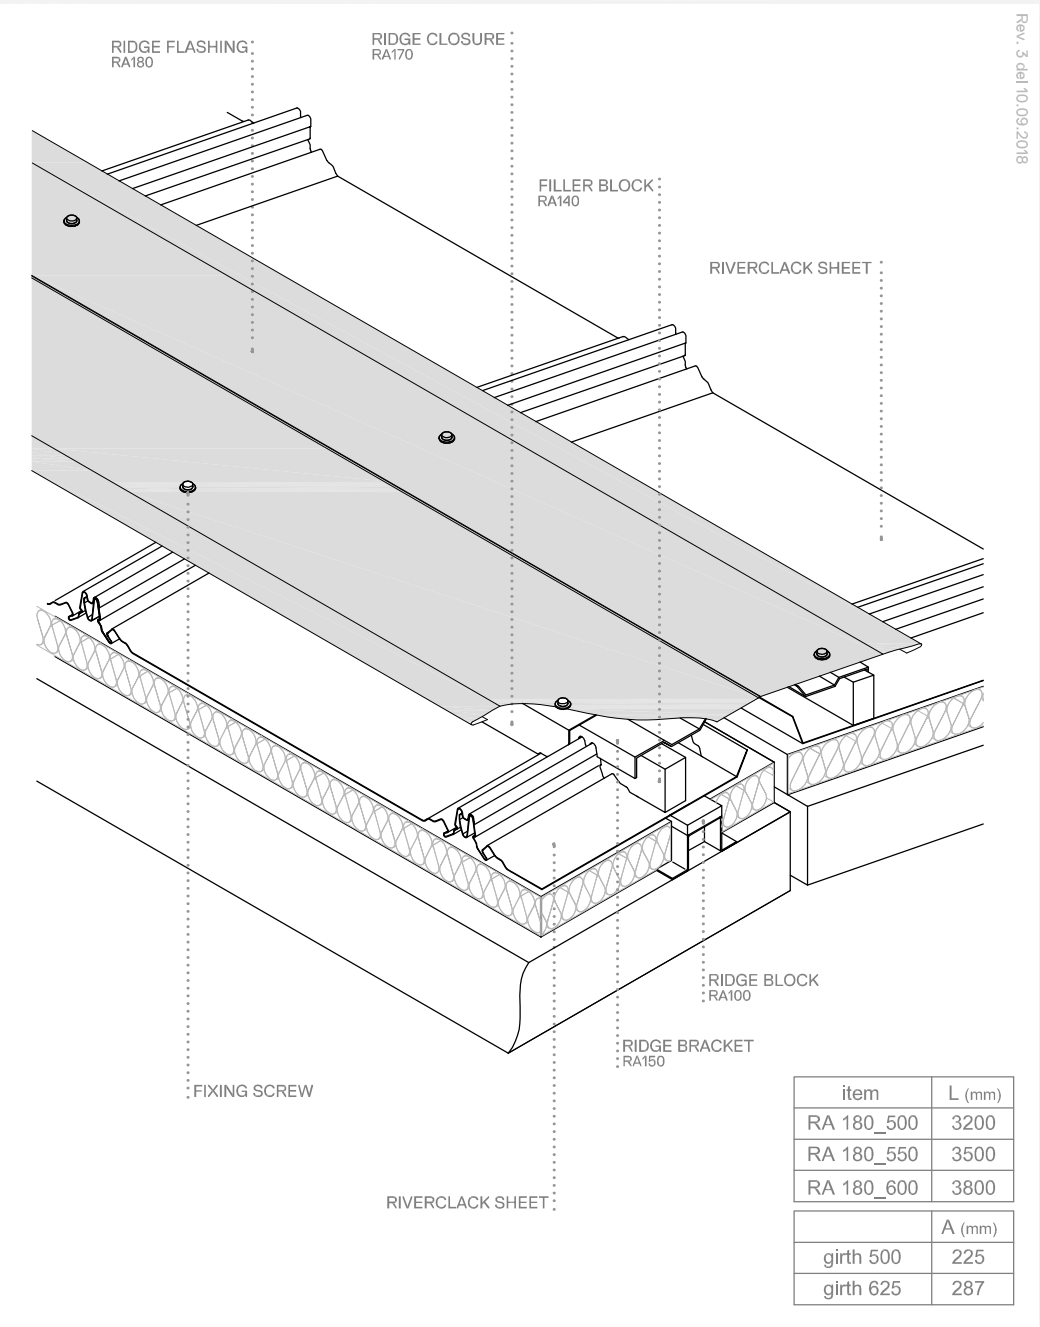

INSTALLATION SEQUENCE

