

NOTES



MATERIALS

AISI 304 stainless steel

SUITABLE FOR

Riverclack 500
Riverclack 550
Riverclack Grip 600

INCLUDED COMPONENTS

- N°1 M8x20 hexagon profile stainless steel screw bolt
- N°1 hexagon profile stainless steel self-locking nut
- N°2 8/24 stainless steel washer

RELATED COMPONENTS


- N°1 polyamide clip

NOTES

- Related polyamide clip is not to be fixed to the purlins
- Keep the related polyamide clip at least 60 mm away from any fixing clip
- Don't mount on the protrudent end zones of the panel
- The design by a competent technician is always recommended, pay special attention to loads deriving from extreme weather conditions

WWW.RIVERCLACK.COM

TECHNICAL SITUATION

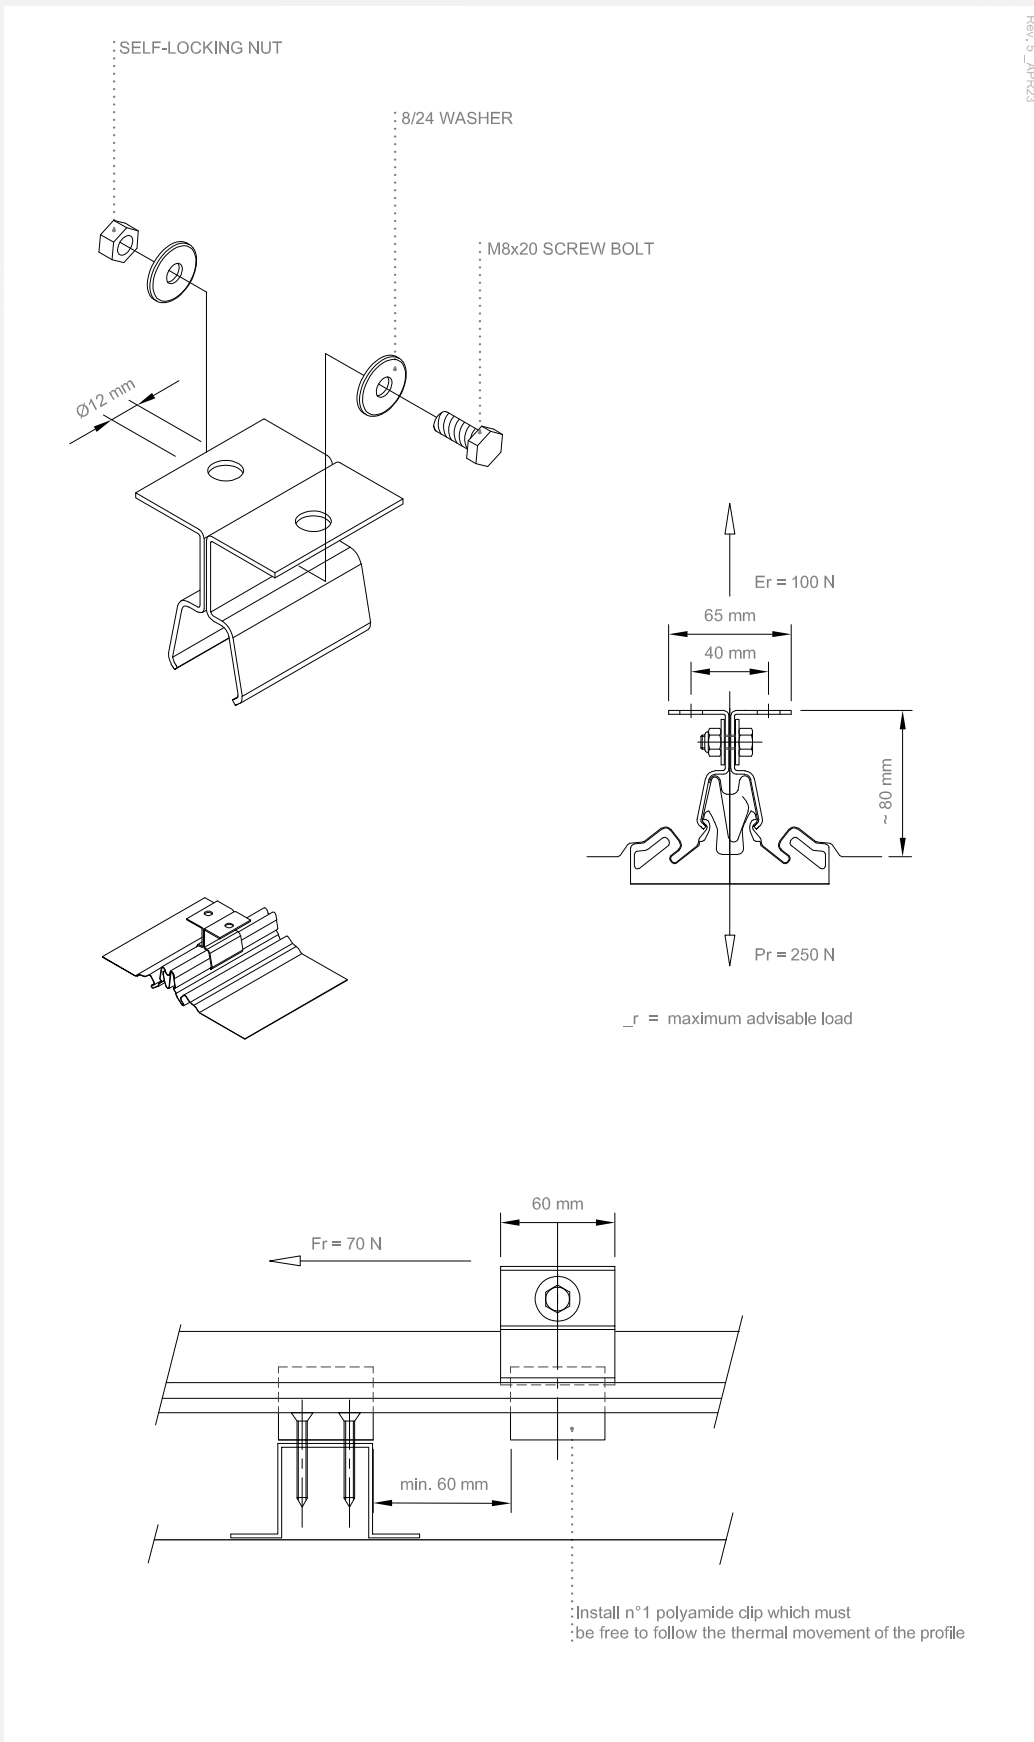

Rev. 5 _APR23