


NOTES



MATERIALS

Aluminium
Stainless steel (bolt)

SUITABLE FOR

Riverclack 500
Riverclack 550
Riverclack Grip 600

INCLUDED COMPONENTS

- N°2 uprights
- N°1 crown
- N°1 M16 special bolt


NOTES

- To be installed on aluminum Riverclack panels 0.7 mm, 0.8 mm and 0.9 mm in thickness, produced from 2005; for different applications contact ISCOM
- In the central slot of the crown a M8 screw bolt can be inserted
- On the two sides of the crown surface items can be fixed with Ø5.5 stainless steel self drilling screws using the groove as guidance
- Don't mount on the protrudent end zones of the panel
- The design by a competent technician is always recommended, pay special attention to loads deriving from extreme weather conditions
- Patented

WWW.RIVERCLACK.COM


TECHNICAL SITUATION

EXPLODED VIEW

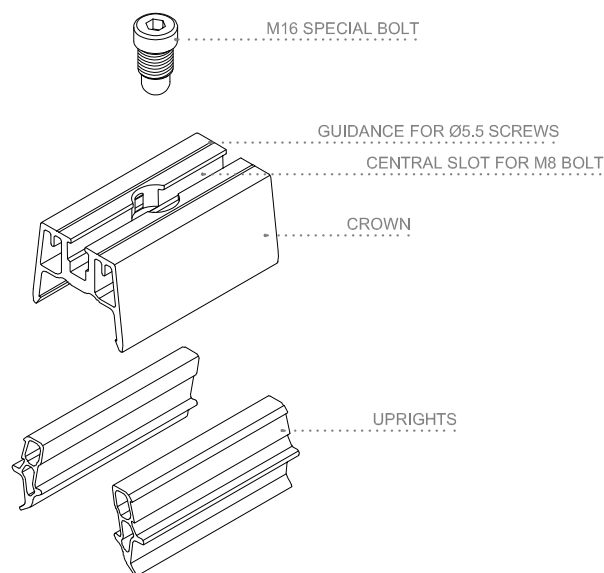

ADMISSIBLE LOADS

A load factor = 3 has been taken into account in the design capacity of the clamp.

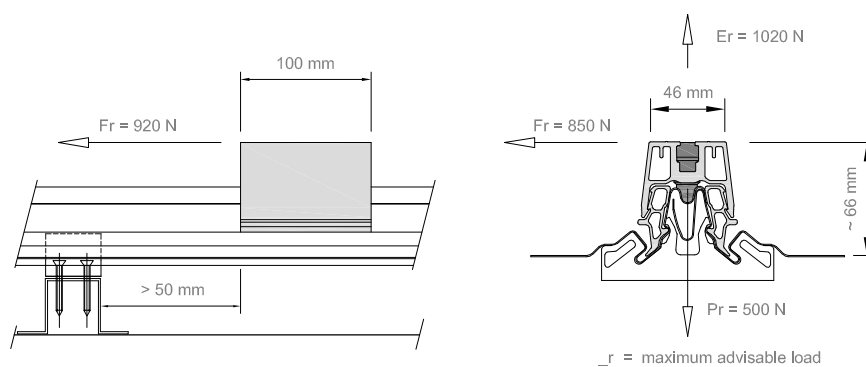

INSTALLATION SEQUENCE

